




BIADESIVO 3M
3M DOUBLE-SIDE TAPE

70102

| Code | Nominal lm/m | Real lm/m | W/m | CCT | LED/m |
|--------------------|--------------|-----------|-----|-------|-------|
| 70102/2700K | 1917 | 1569 | 11 | 2700K | 238 |
| 70102/C | 2018 | 1652 | 11 | 3000K | 238 |
| 70102/N | 2260 | 1850 | 11 | 4000K | 238 |
| 70102/F | 2260 | 1850 | 11 | 6000K | 238 |

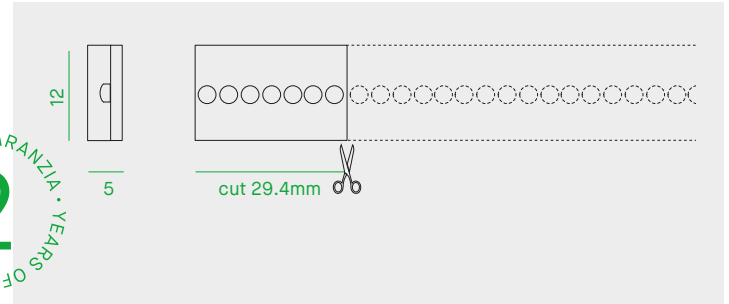

| | | | |
|--|--|--|--|
| Striscia LED da esterno di 5 metri. | LED strip for outdoor use of 5m. | Bandeau LED pour l'extérieur de 5 mètres. | LED Lichtband für aussen von 5 Meter. |
| LED 5050, montato su nastro flessibile 3M con guaina protettiva in silicone. | 5050 LED, coated with a silicone sheath. Assembled on flexible 3M sticky tape. | LED 5050, réalisé sur circuit flexible 3M revêtu d'une couche de silicone. | LED 5050, auf einem flexiblen 3M Band montiert mit Schutzhülle aus Silikon. |
| Life time 30.000h (rendimento 70%). | Life time 30.000h (70% lumen maintenance). | Durée de vie 30.000h (rendement 70%). | Lebensdauer 30.000h (Lichtstrom 70%). |
| È possibile tagliare o piegare il nastro ogni 29.4mm (7 LED). Lunghezza massima consentita del nastro è 5 metri. | Possible flexible and cut points every 29.4mm (7 LEDs). Maximum length allowed for the tape is 5m. | Le bandeau peut être coupé ou plié tous les 29.4mm (7 LEDs). Longueur maximum pour le circuit flexible 5 mètres. | Alle 29.4mm (7 LED) schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 5 Meter. |
| Nella confezione sono inclusi il kit di fissaggio e il kit per ripristinare il grado di protezione IP67. | Fixing kit and IP67 kit included. | Inclus kit de fixation et kit pour rétablir la protection IP67. | Befestigungs-Kit und wiederherstellbarer Schutz-Kit sind enthalten. |
| Profili in alluminio da ordinare separatamente. | Aluminium profiles to be ordered separately. | Profils en aluminium à commander séparément. | Aluminiumprofile separat zu bestellen. |
| Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo. | In case more LED strips have to be connected to one power supply, connect them in parallel. | Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation. | Mehrere LED-Lichtbänder sollten parallelgeschaltet werden. |

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

| Code IP20 | W | max m | Code IP20 | W | max m | Code IP67 | W | max m | Code IP67 | W | max m |
|-----------|-----|-------|----------------------|-----|-------|-----------|----|-------|-----------|-----|-------|
| 5855 | 20 | 1.5 | 5801 (PUSH/DIM1-10V) | 100 | 7.5 | 5788 | 25 | 1.5 | 5784 | 100 | 7.5 |
| 5674 | 70 | 5.0 | 5802/T (PUSH/DALI) | 100 | 7.5 | 5789 | 40 | 3.0 | 5672 | 150 | 11.5 |
| 5678 | 75 | 5.5 | | | | 5782 | 60 | 4.5 | 5676 | 150 | 11.5 |
| 5677 | 120 | 9.0 | | | | 5673 | 70 | 5.0 | 5785 | 240 | 13.5 |
| 5675 | 150 | 11.5 | | | | 5783 | 75 | 5.5 | 5786 | 320 | 24.0 |

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich.

| Code | Descrizione | Description | Description | Beschreibung |
|---------------|---|---|---|---|
| KIT EM/LED/1H | Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah | Emergency kit for LED1 hour - Batt.7.2V - 1.5Ah | Kit éclairage secouru pour LED1 heure - Batt.7.2V - 1.5Ah | Notfall Kit für LED1 Stunde - Batt.7.2V - 1.5Ah |
| KIT EM/LED/3H | Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah | Emergency kit for LED3 hours - Batt.7.2V - 4Ah | Kit éclairage secouru pour LED3 heures - Batt.7.2V - 4Ah | Notfall Kit für LED3 Stunden - Batt.7.2V - 4Ah |

Unità di gestione da ordinare separatamente - Control units to be ordered separately - Unités de gestion à commander séparément - Steuergeräte separat zu bestellen

| Code | Descrizione | Description |
|---------------|--|---|
| 5856 | Dimmer PWM PUSH/DIM 0/1-10V | Dimmer PWM PUSH/DIM/1-10V |
| 5834/B | Centralina Bluetooth RGB-RGBW-Tunable White-Dimming | RGB-RGBW-Tunable White-Dimming Bluetooth control unit |
| 186155/DIMMER | Dimmer 1-10V monocolor | Dimmer 1-10V mono-color |
| 5854 | Dimmer DALI monocolor | DALI mono-color dimmer |
| 5950/TW | Centralina di controllo Tunable White e Dimming | Tunable White and Dimming control unit |
| 5951/C | Telecomando a 4 zone per centralina 5950/TW | Remote controller 4 zones for 5950/TW control unit |
| 5952/T | Pannello Touch da parete a 4 zone per centralina 5950/TW | Wall touch panel 4 zones for 5950/TW control unit |
| 5960/U | Centralina Wi-Fi RGB-RGBW-Tunable White-Dimming | RGB-RGBW-Tunable White-Dimming Wi-Fi control unit |
| 5961/G | Gateway Wi-Fi per centralina 5940/U e 5950/TW | Gateway Wi-Fi for 5940/U and 5950/TW control unit |

Profili in alluminio compatibili - Suitable aluminium profiles available

2m da superficie, parete e plafone - wall and ceiling surface-mounted of 2m

| Code | Trasparente/Transparent | Opale/Opal | Acidato/Acid-etched |
|----------------|-------------------------|------------------|---------------------|
| | | Lens | Lens |
| BARRA/STRIP/7 | | | |
| BARRA/STRIP/10 | | BARRA/STRIP/10/S | BARRA/STRIP/10/A |
| BARRA/STRIP/19 | | BARRA/STRIP/19/S | BARRA/STRIP/19/A |
| PA/01 | | PA/01/S | -- |
| -- | | PA/02/S | -- |
| PA/03 | | PA/03/S | -- |

| Code | Trasparente/Transparent | Opale/Opal | Acidato/Acid-etched |
|-------|-------------------------|------------|---------------------|
| PA/04 | | PA/04/S | -- |
| PA/06 | | PA/06/S | -- |

2m da incasso - recessed-mounted of 2m

| Code | Trasparente/Transparent | Opale/Opal | Acidato/Acid-etched |
|----------------|-------------------------|------------------|---------------------|
| BARRA/STRIP/9 | | BARRA/STRIP/9/S | BARRA/STRIP/9/A |
| BARRA/STRIP/16 | | BARRA/STRIP/16/S | BARRA/STRIP/16/A |
| BARRA/STRIP/17 | | BARRA/STRIP/17/S | BARRA/STRIP/17/A |
| PA/05 | | PA/05/S | -- |

| Code | Trasparente/Transparent | Opale/Opal | Acidato/Acid-etched |
|-------|-------------------------|------------|---------------------|
| PA/07 | | PA/07/S | -- |

2m angolare - angled of 2m

| Code | Trasparente/Transparent | Opale/Opal | Acidato/Acid-etched |
|----------------|-------------------------|------------------|---------------------|
| BARRA/STRIP/6 | | BARRA/STRIP/6/S | BARRA/STRIP/6/A |
| BARRA/STRIP/11 | | BARRA/STRIP/11/S | BARRA/STRIP/11/A |
| BARRA/STRIP/12 | | BARRA/STRIP/12/S | BARRA/STRIP/12/A |

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente / Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.