


## Distanziali metallici

### CARATTERISTICHE TECNICHE

Acciaio zincato  
 Profilo esagonale  
 Filettature M - F (Maschio-Femmina)  
 M3 - M4 - M5 - M6 - M8  
 A norma DIN 176  
 Resistenza alla trazione 500 N/mm<sup>2</sup>

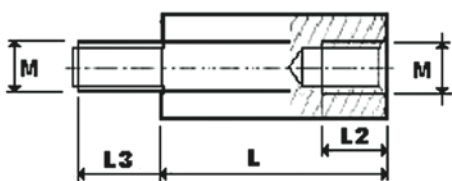

Codice	Riferimento		CH (mm)	L (mm)	M (mm)	L3 (mm)	L2 (mm)
DZM0995	DZM 20M3	100	6	20	M3	6	10
DZM1000	DZM 10M4	100	7	10	M4	8	6
DZM1005	DZM 15M4	100	7	15	M4	8	10
DZM1010	DZM 20M4	100	7	20	M4	8	10
DZM1015	DZM 25M4	50	7	25	M4	8	10
DZM1020	DZM 30M4	50	7	30	M4	8	10
DZM1025	DZM 35M4	50	7	35	M4	8	10
DZM1030	DZM 40M4	50	7	40	M4	8	10
DZM1035	DZM 50M4	50	7	50	M4	8	10
DZM1040	DZM 60M4	50	7	60	M4	8	10
DZM1042	DZM 70M4	25	7	70	M4	8	10
DZM1044	DZM 90M4	25	7	90	M4	8	10

DZM1093	DZM 10M5	100	8	10	M5	8	6
DZM1045	DZM 15M5	100	8	10	M5	8	6
DZM1050	DZM 20M5	100	8	20	M5	8	10
DZM1055	DZM 25M5	50	8	25	M5	8	10
DZM1060	DZM 30M5	50	8	30	M5	8	10
DZM1065	DZM 35M5	50	8	35	M5	8	10
DZM1070	DZM 40M5	50	8	40	M5	8	10
DZM1075	DZM 50M5	50	8	50	M5	8	10
DZM1080	DZM 60M5	50	8	60	M5	8	10
DZM1085	DZM 70M5	25	8	70	M5	8	10
DZM1090	DZM 80M5	25	8	80	M5	8	10
DZM1092	DZM 90M5	25	8	90	M5	8	10

DZM1095	DZM 10M6	100	10	10	M6	10	6
DZM1100	DZM 15M6	100	10	15	M6	10	10
DZM1105	DZM 20M6	100	10	20	M6	10	12
DZM1106	DZM 25M6	50	10	25	M6	10	12
DZM1110	DZM 30M6	50	10	30	M6	10	12
DZM1115	DZM 40M6	50	10	40	M6	10	12
DZM1120	DZM 50M6	50	10	50	M6	10	12
DZM1125	DZM 60M6	50	10	60	M6	10	12
DZM1130	DZM 70M6	25	10	70	M6	10	12
DZM1135	DZM 80M6	25	10	80	M6	10	12
DZM1140	DZM 90M6	25	10	90	M6	10	12
DZM1145	DZM 100M6	25	10	100	M6	10	12

DZM1150	DZM 20M8	100	13	20	M8	14	14
DZM1155	DZM 25M8	50	13	25	M8	14	14
DZM1160	DZM 30M8	50	13	30	M8	14	14
DZM1165	DZM 40M8	50	13	40	M8	14	14
DZM1170	DZM 50M8	50	13	50	M8	14	14
DZM1175	DZM 70M8	25	13	70	M8	14	14



## Morsettiere in ottone

Codice	Riferimento		Peso (Kg)	L (mm)	A (mm)	B (mm)	Ø fori (mm)	n° fori	IN/OUT	Sez. cavo nudo (mm <sup>2</sup> )	Sez. cavo con puntalino (mm <sup>2</sup> )	(Nm)
MRS1500	MRS 8-6	10	0,340	1000	8	6	4,5	153	← OUT	2,5 ÷ 6	1,5 ÷ 6	2 - 3
MRS1505	MRS 13-6	10	0,554	1000	13	6	9,5	83	← OUT	10 ÷ 35	10 ÷ 25	2 - 3

### CARATTERISTICHE TECNICHE

In ottone  
 Complete di viti di fissaggio M4 in acciaio zincato con testa a croce  
 Lunghezza 1 metro

