





SCHEMA TECNICA



HZ112

Batteria ricaricabile al piombo sigillata 6 V - 12 Ah / 20 Hr

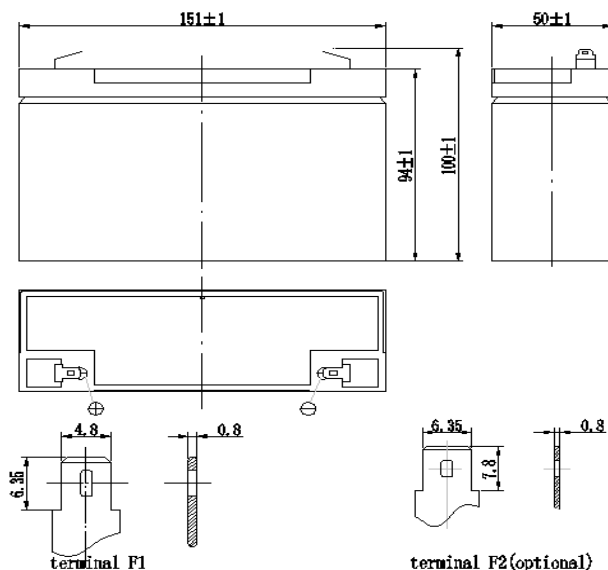

CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

TECHNOLOGY PARAMETER

Battery model	HZ112			
Designed Floating Life	3~5 Years			
Capacity (25°C)	20hR(0.6 A, 5.25V)	10hR(1.14A, 5.25V)	5hR(2.06A, 5.25V)	1hR(8.09A, 4.80V)
	12Ah	11.4Ah	10.3Ah	8.09Ah
Dimensions	Length	Width	Height	Total Height
	151±1 mm	50±1 mm	94±1 mm	100±1 mm
Approx. weight (±5%)	1.70Kg			
Internal resistance	Full charged at 25°C: Approx. 11mOhms			
Self discharge	3% of capacity declined per month at 25°C (average)			
Capacity Affected by Temp.(20HR)	40 °C	25 °C	0 °C	-15 °C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/°C), max. Current: 3.60A		6.75-6.9V(-10mV/°C)	

HZ112



Batteria ricaricabile al piombo sigillata 6 V - 12 Ah / 20 Hr

Constant current discharge ratings-amperes at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	46.3	32.6	24.9	13.8	8.09	3.40	2.15	1.22	0.621
1.65V	44.5	31.4	24.2	13.3	7.70	3.29	2.12	1.19	0.616
1.70V	41.9	30.2	23.6	12.8	7.33	3.18	2.09	1.16	0.608
1.75V	39.3	29.0	22.7	12.3	6.96	3.05	2.06	1.14	0.600
1.80V	36.8	27.8	22.0	11.8	6.81	2.91	2.02	1.11	0.589

Constant power discharge ratings-watts at 25°C


End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	85.7	60.4	46.4	25.8	15.2	6.43	4.08	2.32	1.19
1.65V	81.8	57.8	44.8	24.7	14.4	6.19	4.00	2.26	1.18
1.70V	76.7	55.3	43.5	23.6	13.6	5.95	3.92	2.20	1.16
1.75V	71.6	52.8	41.6	22.6	12.9	5.67	3.85	2.14	1.13
1.80V	66.2	50.0	39.8	21.4	12.5	5.35	3.74	2.07	1.10

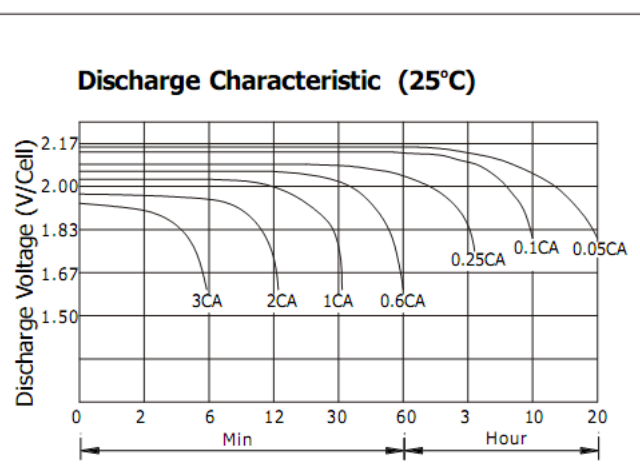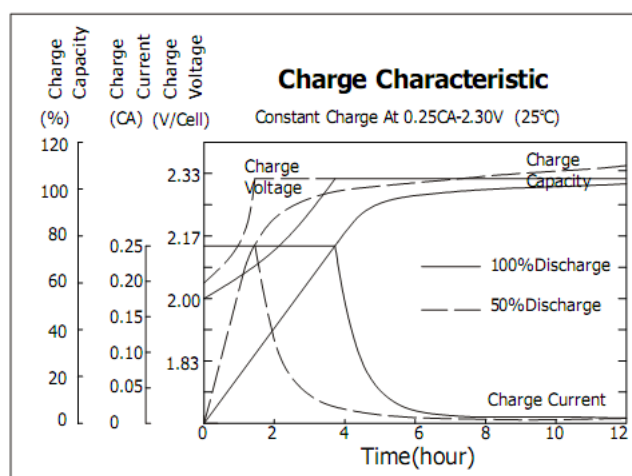



HZ112

Batteria ricaricabile al piombo sigillata 6 V - 12 Ah / 20 Hr

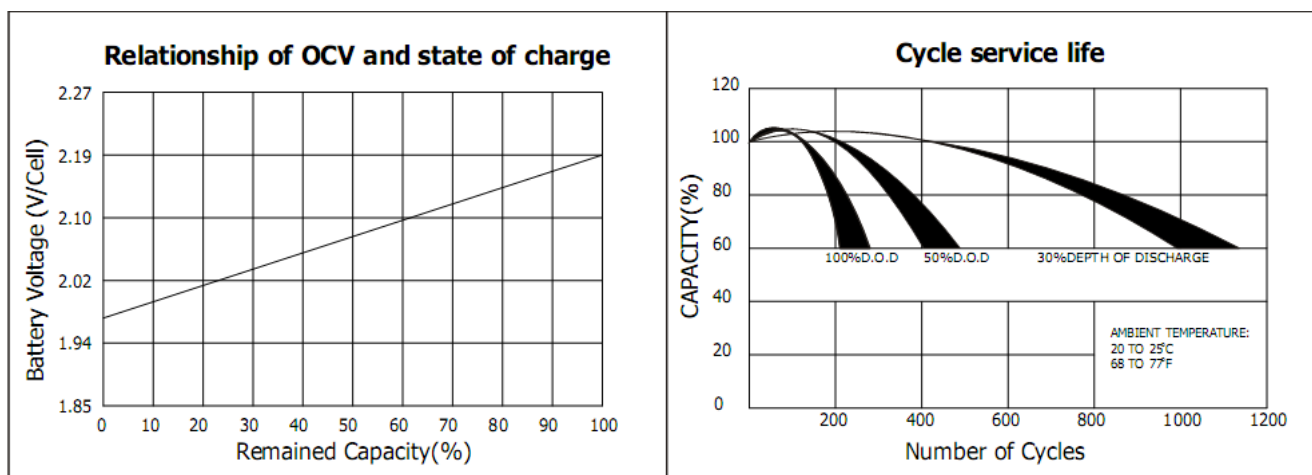

Istruzioni ricarica (a 20° C)

Uso ciclico : 7,2 - 7,5 V

Uso Standby : 6,75 - 6,9 V

Corrente iniziale inferiore a 3,6 A

Codice EAN13 : 8057681467129