





SCHEDA TECNICA



HZ105

Batteria ricaricabile al piombo sigillata 6 V - 4,5 Ah / 20 Hr

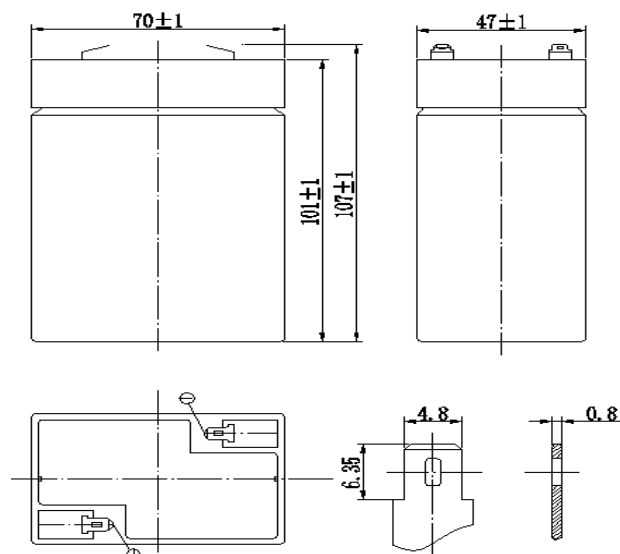

CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

TECHNOLOGY PARAMETER

Battery model				
Designed Floating Life	3~5 Years			
Capacity (25°C)	20hR(0.225A, 5.25V)	10hR(0.448A, 5.25V)	5hR(0.82A, 5.25V)	1hR(3.25A, 4.80V)
	4.5Ah	4.48Ah	4.1Ah	3.25Ah
Dimensions	Length	Width	Height	Total Height
	70±1mm	47±1mm	101±1mm	107±1mm
Approx. weight (±5%)	0.72Kg			
Internal resistance	Full charged at 25°C: Approx. 25mOhms			
Self discharge	3% of capacity declined per month at 25°C (average)			
Capacity Affected by Temp.(20HR)	40 °C	25 °C	0 °C	-15 °C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/°C), max. Current: 1.35A		6.75-6.9V(-10mV/°C)	

HZ105



Batteria ricaricabile al piombo sigillata 6 V - 4,5 Ah / 20 Hr

Constant current discharge ratings-amperes at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	18.5	12.9	9.85	5.54	3.25	1.36	0.89	0.470	0.245
1.65V	17.6	12.4	9.37	5.32	3.18	1.32	0.87	0.462	0.240
1.70V	16.5	11.7	8.89	5.09	3.11	1.28	0.84	0.453	0.235
1.75V	15.5	11.0	8.41	4.84	2.97	1.22	0.82	0.448	0.225
1.80V	14.4	10.4	7.93	4.60	2.83	1.17	0.79	0.439	0.221

Constant power discharge ratings-watts at 25°C

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	34.2	23.9	18.3	10.4	6.10	2.58	1.69	0.90	0.47
1.65V	32.3	22.7	17.3	9.90	5.96	2.48	1.64	0.88	0.46
1.70V	30.2	21.3	16.4	9.42	5.78	2.39	1.58	0.86	0.45
1.75V	28.2	20.0	15.4	8.90	5.50	2.27	1.53	0.84	0.43
1.80V	26.0	18.7	14.3	8.37	5.18	2.15	1.47	0.82	0.41

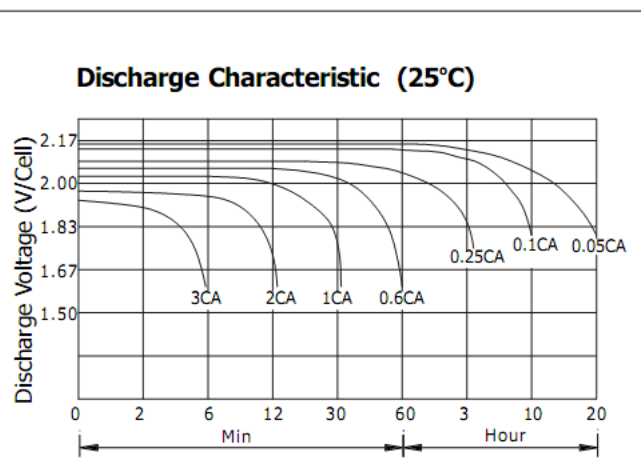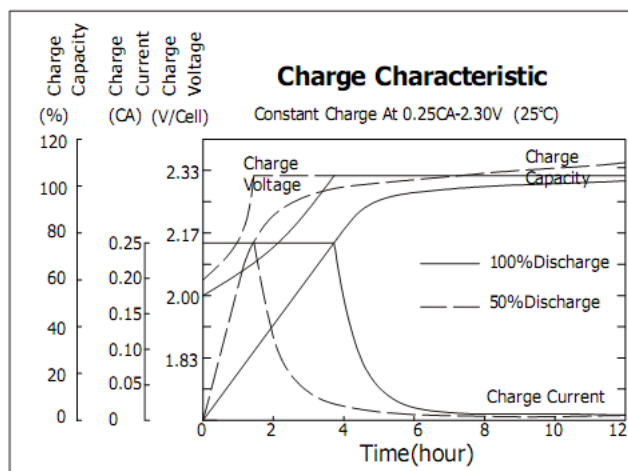




SCHEDA TECNICA

MATSUYAMA

MY[®]
ELECTRONICS

HZ105

Batteria ricaricabile al piombo sigillata
6 V - 4,5 Ah / 20 Hr

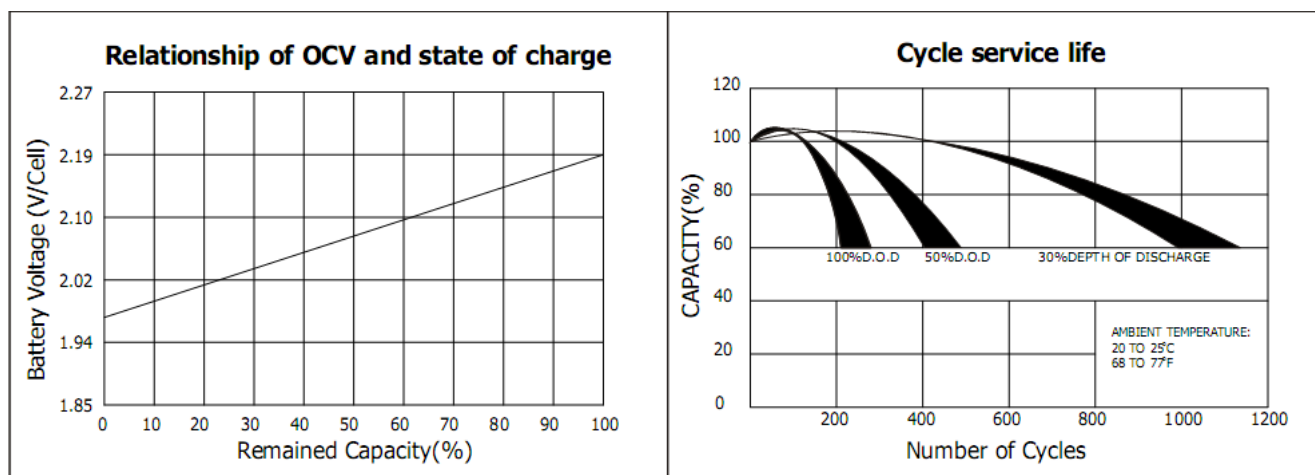

Istruzioni ricarica (a 20° C)

Uso ciclico : 7,2 - 7,5 V

Uso Standby : 6,75 - 6,9 V

Corrente iniziale inferiore a 1,35 A

Codice EAN13 : 8057681467099

